




formerly Aquionics, Berson, Hanovia and Orca GmbH

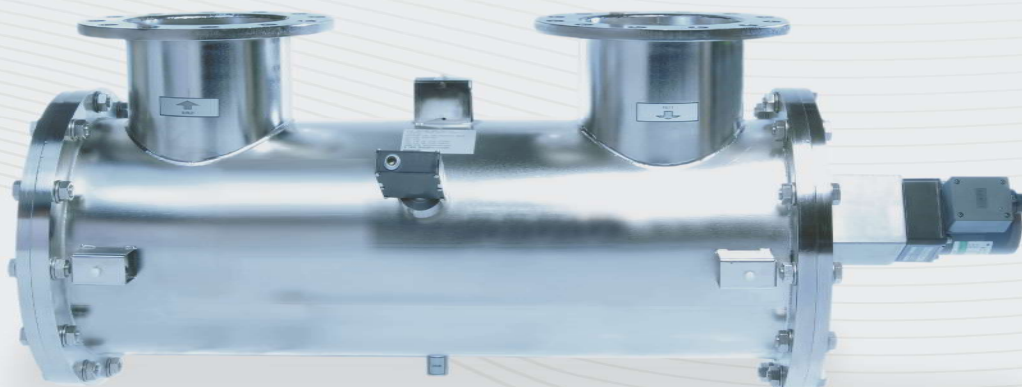

SwimLine Splash PH

UV TREATMENT FOR POOLS AND SPAS


Our **SwimLine Splash PH** UV systems deliver effective treatment (chloramine removal and treatment) for all leisure facilities from spas through to large competition pools. By using medium pressure lamps we break down not only monochloramine but also di- and trichloramine which are responsible for eye and skin irritation, headaches and unpleasant odours. Using UV in the water treatment process provides bathers and staff with a pleasant and safe environment. UV has the added advantage of being effective against chlorine resistant microorganisms such as Cryptosporidium and is up to 5 times cheaper to maintain and occupies only 1/10th of the space of ozonation equipment.

UVCCELLTM
WYŁĄCZNY DYSTRYBUTOR NA RYNKU POLSKIM




Application
Optimised UV for
Pools & Leisure

SWIMLINE SPLASH PH™ - SINGLE POOL WITH UV TREATMENT

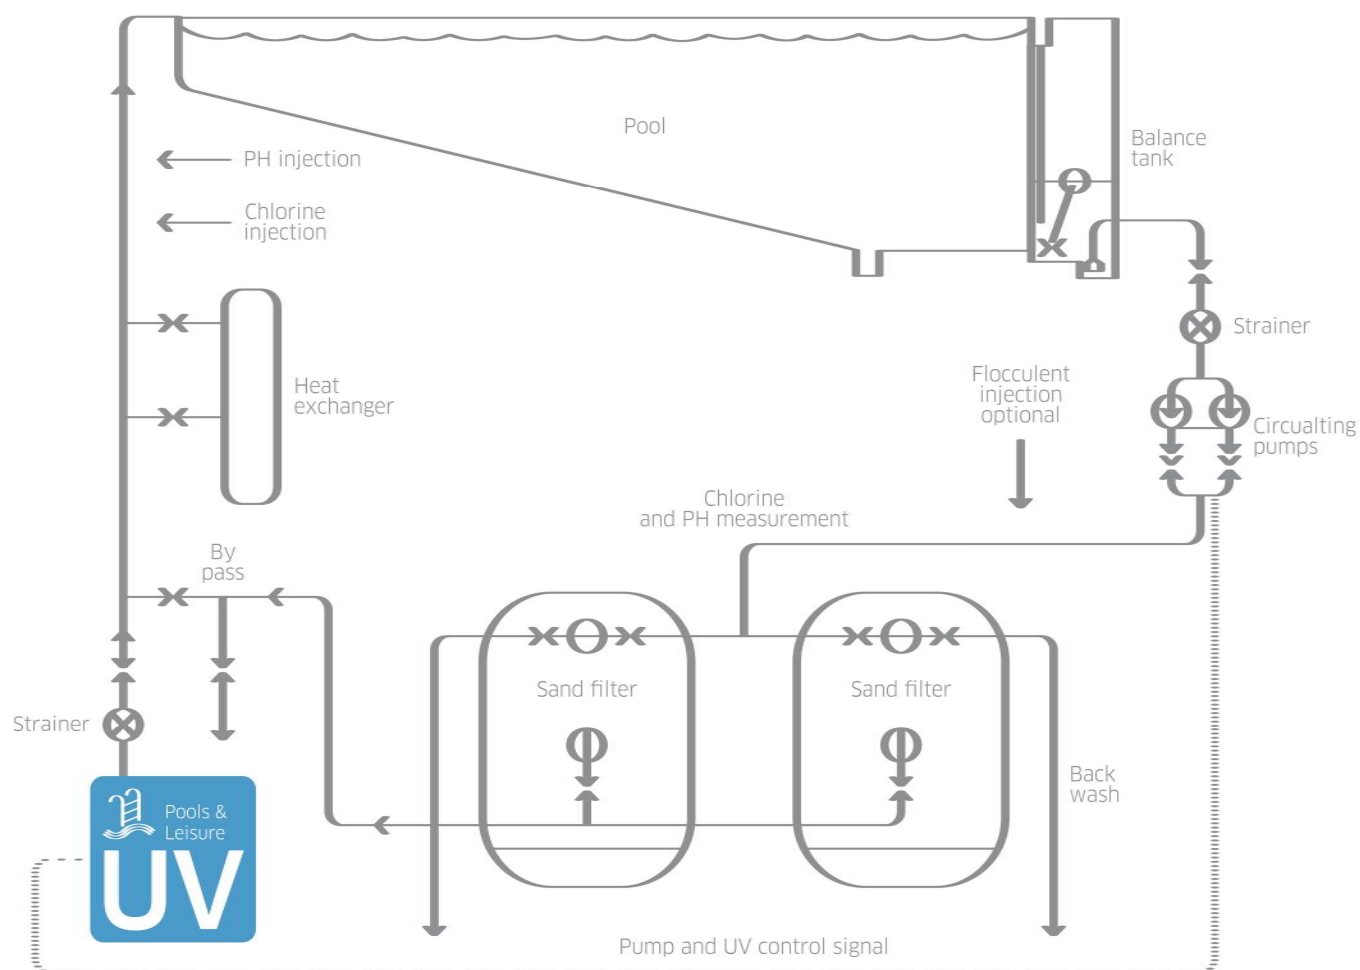

KEY FEATURES	WHAT IT GIVES YOU	BENEFITS FOR YOU
INTELLIGENCE		
*UV intensity monitor	Continuous verification of performance with in-built low intensity or dose alarm	Easy to monitor and log system performance
Flow meter input	Real time adjustment of lamp power based on flow, if *UV monitor and *Power stepping are added.	Saves power
OPTIMISATION		
Medium pressure lamp	Provides UV light at 200 to 400 nm wavelengths ideal for the destruction of mono-, di- and trichloramine	Visibly clear water with reduced odours
	Provides germicidal wavelengths to treat the water	Reduced building corrosion risk
	*Automatic wiper (quartz cleaning)	Minimises bathers' eye and skin irritation
		Protect bathers from chlorine resistant microorganisms such as Cryptosporidium or Giardia
		Self cleaning
INTEGRATION		
Designed specifically for pools	UVShield™ power cut-out for lamp access (option)	Enhanced operator safety when changing a lamp
	Water leak detection (option)	Increased bather safety when used with a strainer
*Option		

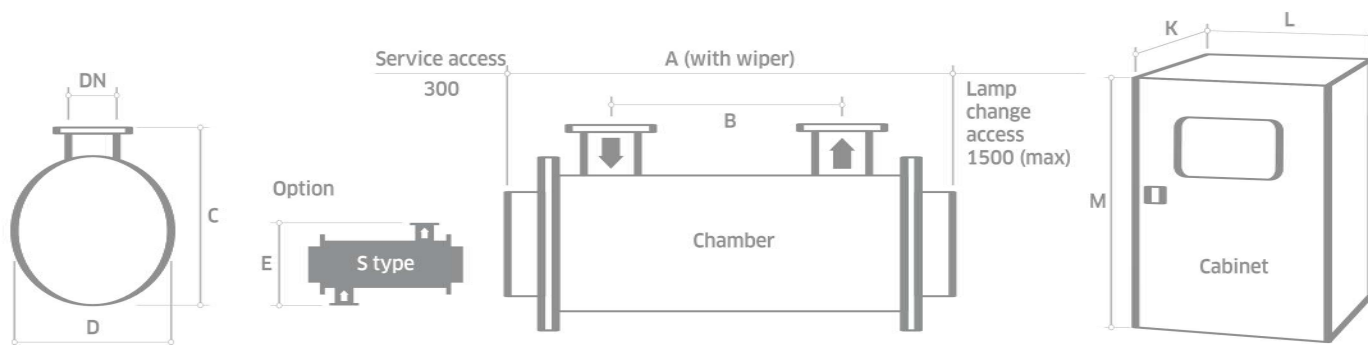

MODEL NUMBER	MAX POWER (KW)	MIN UVT (%)	DIMENSIONS (MM)									APPROX WEIGHT (KG)	
			A	B	C	D	E	DN	K*	L	M**	Chamber (Empty)	Control Cabinet
SwimLine Splash PH 60	1.6	85	850	240	320	240	400	80	330	750	850	40	85
SwimLine Splash PH 70	1.6	85	850	240	320	240	400	100	330	750	850	45	85
SwimLine Splash PH 120	2.7	78	1300	660	320	240	400	150	330	750	850	50	85
SwimLine Splash PH 195	4.4	81	1300	660	320	240	400	150	330	750	850	50	85
SwimLine Splash PH 295	4.4	90	1300	610	420	290	550	200	330	750	850	75	85
SwimLine Splash PH 470	5.8	84	1300	610	420	290	550	200	330	900	1100	75	165
SwimLine Splash PH 600	5.8	93	1300	550	505	410	600	250	330	900	1100	120	165
SwimLine Splash PH 705	5.8	93	1800	960	505	410	600	300	330	900	1100	160	165
SwimLine Splash PH 850	12.5	62	1800	960	505	410	600	300	330	1100	1600	160	270
SwimLine Splash PH 990	16.5	76	1800	930	540	430	650	350	330	1100	1600	200	282

All dimensions are approximate for clearance purposes only. We have a policy of continuous product development, exact drawings are available on request.
All specifications are subject to change without notification. Your distributor or our account manager can advise on correct sizing and specification requirements.

* Allow dimension L in front of cabinet for door opening and panel access.

** M dimension includes the space for the cabinet mounting brackets but you need to allow space below the cabinet for cable entry and access (minimum of 250 mm).

UV CHAMBER

Material:	Stainless steel 316L / 1.4404
Internal finish:	As made pipe and tube, welds as laid, electropolished and passivated
External finish:	Sateen polish (120 grit) electropolished and passivated
Process (mating) connections:	Flange EN 1092-1 PN16
Drain connection:	BSPT or NPT if ANSI flange
End plate:	Removable end plate
Degree of protection:	IP65 equivalent to NEMA 4 but not for outside use
Arc tube (lamp):	Medium pressure
Arc tube enclosure:	Pure quartz (F200)
Number of arc tubes (lamps):	1 (Splash PH 60-705) 3 (Splash PH 850) 4 (Splash PH 990)
Expected lamp life:	4000-8000 hours
Temperature sensor:	Yes
Working fluid temperature:	1°C to 60°C
Hydrostatically pressure tested:	Yes to PED requirements EN 13445
Chamber mounting:	Horizontal only
Operating pressure:	6 bar (positive pressure only)
Pressure loss:	Typically < 70 mbar
Seals:	EPDM

OPTIONS

Operation and Maintenance manual and printed Installation and Commissioning manual in Chinese, English, French, German and Spanish	
Flange options: ANSI 150 (with NPT drain), JIS, Table 'E'	
Wiper: automatic (electrically driven)	
Strainer	
UV monitor: wet UV monitor (to minimum UVT)	
Power adjustment: 4 level power stepping	
Lead length: 20 m, 30 m or 50 m cabinet to chamber	
Skid mounting (not ship board or earthquake zone)	
Air vent connection: BSPT or NPT if ANSI flange	

OPTIONS (CONTINUED)

Aggressive water package: For 400 ppm to 20000 ppm chloride water	
UVShield™: Power cut-out for lamp access	
Water leak detection: Detects water leaks from quartz sleeve	
Chamber configuration: S shape	

CABINET (CONTROLLER PHOTON)

Material:	Polyester coated carbon steel
Degree of protection:	IP54 NEMA 12
Supply voltages (nominal):	Splash PH 60-120 95 V to 260V (+/-10%) Splash PH 195-705 190 V to 480 V (+/-10%) Splash PH 850-990 380 V to 480 V (+/-10%) 50/60 Hz
Operating temperature range:	5°C to 40°C
Relative humidity:	<85% non-condensing
Cooling fans:	Yes
Interconnecting cable:	10 m cabinet to chamber

CUSTOMER OUTPUTS

4-20 mA passive or active outputs:	UV intensity, or UV dose if Power stepping option is added
VFC outputs:	System warning, lamp ready, low UV, common trip, remote reset, ELCB or water leak, system available, local or remote mode

CUSTOMER INPUTS

4-20 mA passive or active input:	Flow meter
VFC inputs:	Remote stop/start and remote reset

CUSTOMER COMMUNICATIONS PORT

None

APPROVALS

CE marked, UL listed E 149108



SwimLine PH

Also available in our Pools & Leisure product range...



3rd party validated
systems for critical
treatment and
dechloramination

Canada

+1 980.256.5700
americas@nuvonicuv.com

China

+86 21 61679599
apac@nuvonicuv.com

Germany

+49 611 44575375
emea@nuvonicuv.com

Malaysia

+60 16 440 8834
sea@nuvonicuv.com

Poland

+48 511 744 077
biuro@arwito.pl

Mexico

+1 980.256.5700
americas@nuvonicuv.com

United Kingdom

+44 1753 515300
emea@nuvonicuv.com

USA

+1 980 256 5700
americas@nuvonicuv.com



NUVONIC

A Halma company

formerly Aquionics, Berson, Hanovia and Orca GmbH

www.uvcell.pl

nuvonicuv.com

©2022 Nuvonic 910430-4700-02-EN



FM 29365