




formerly Aquionics, Berson, Hanovia and Orca GmbH

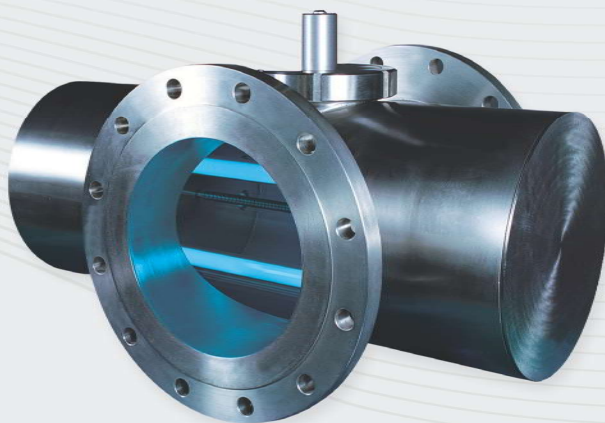

UV Swim I

OPTIMIZED UV TREATMENT FOR POOLS AND SPAS


Our UV Swim I systems are NSF50 listed and are third party validated to meet the Model Aquatic Health Code (MAHC), US EPA UVDGM and DVGW requirements. The system are optimized to deliver effective treatment (chlorine removal) for all leisure facilities from spas through to large competition pools. By using medium pressure lamps we break down not only monochloramine but also di- and trichloramine which are responsible for eye and skin irritation, headaches and unpleasant odours. Using UV in the water treatment process provides bathers and staff with a pleasant and safe environment. UV has the added advantage of being effective against chlorine resistant microorganisms such as Cryptosporidium and is up to 5 times cheaper to maintain and occupies only 1/10th of the space of ozonation equipment.

UVCCELL™
WYŁĄCZNY DYSTRYBUTOR NA RYNKU POLSKIM




Application
Optimized UV for
Pools & Leisure

UV SWIM I FLOW DIAGRAM FOR SINGLE POOL WITH UV TREATMENT

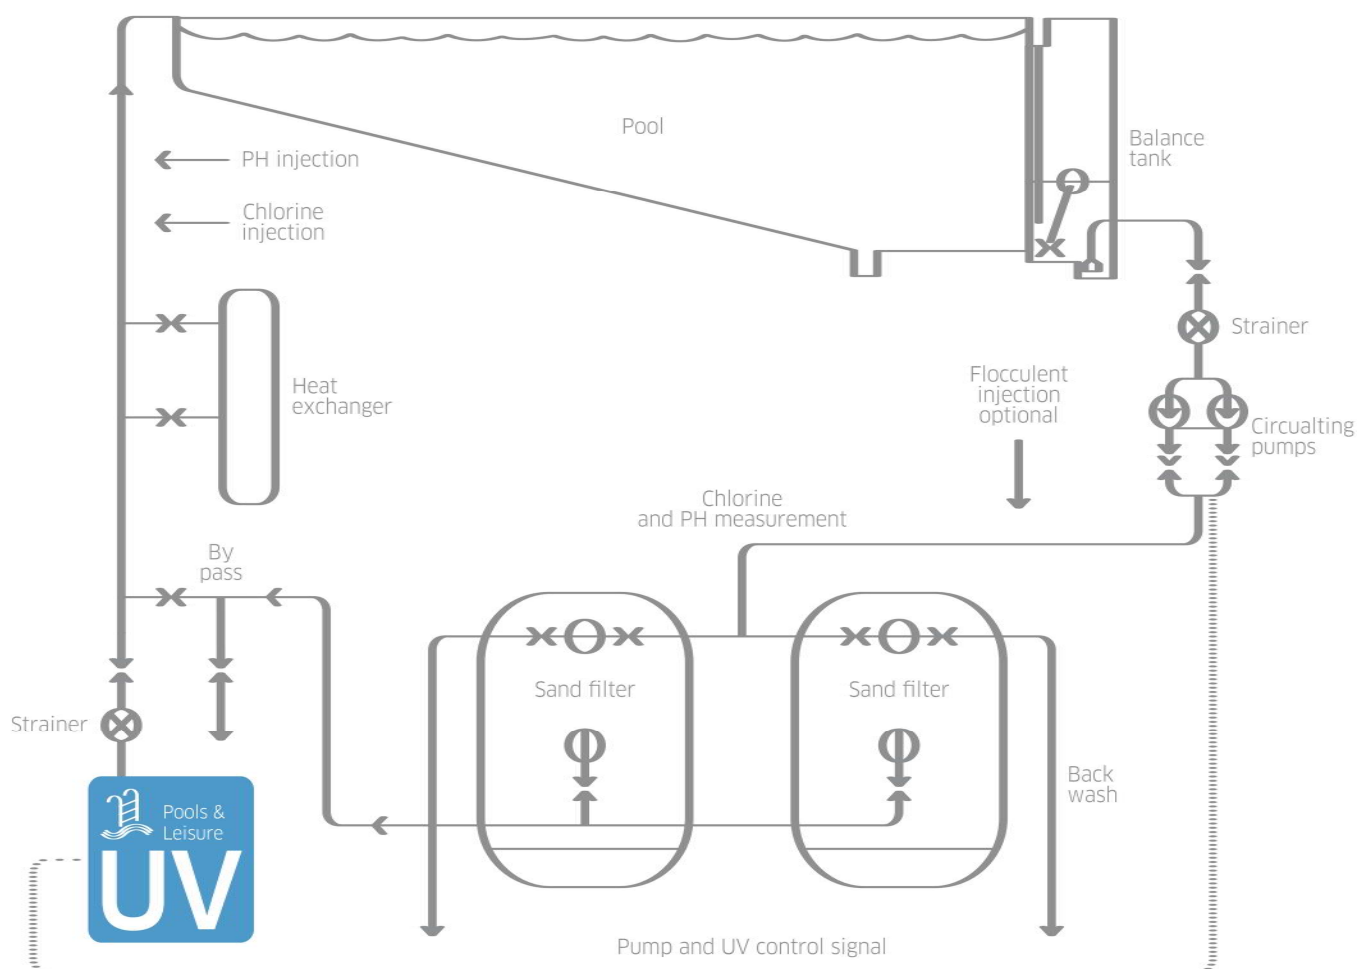

KEY FEATURES	WHAT IT GIVES YOU	BENEFITS FOR YOU
INTELLIGENCE		
Dry DVGW approved UV sensor measuring active wavelengths	Continuous verification of performance with in-built low intensity alarm	Easy to monitor and log system performance
Flow meter input	Stepless adjustment of lamp power based on real time operating conditions	Optimized use of energy, saving operating costs
OPTIMISATION		
Medium pressure lamps	Provides UV light at 200 to 400 nm wavelengths ideal for the destruction of mono-, di- and trichloramine	Visibly clear water with reduced odours
	Provides germicidal wavelengths to treat the water	Reduced corrosion risk
	Lower Maintenance cost and maintenance time	Minimizes bathers' eye and skin irritation
Automatic wiper (quartz cleaning)	Self cleaning	Protect bathers from chlorine resistant microorganisms such as Cryptosporidium or Giardia
INTEGRATION		
Designed specifically for pools	Compact design	Reduced operating costs
		Easy integration

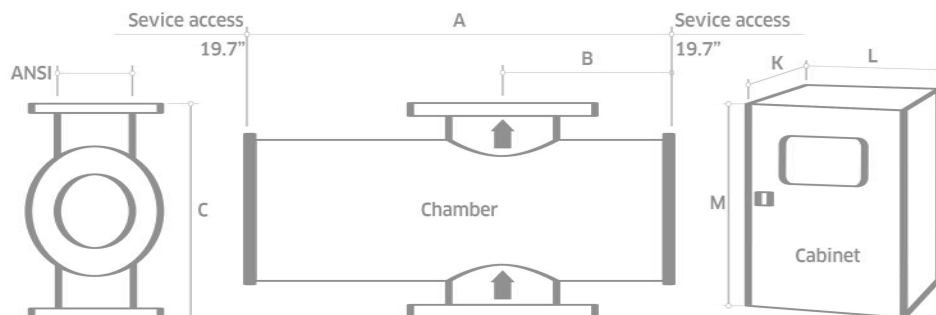

- * Allow dimension L in front of cabinet for door opening and panel access.
- ** M dimension includes the space for the cabinet mounting brackets but you need to allow space below the cabinet for cable entry and access (minimum of 9.8").
- *** CC: Control cabinet, PC: Power cabinet
- ° Attention: the optional cabinet with A/C is bigger. Ask for dimensions.

All dimensions are approximate for clearance purposes only. We have a policy of continuous product development, exact drawings are available on request.

All specifications are subject to change without notification. Your distributor or our account manager can advise on correct sizing and specification requirements.

MODEL NUMBER	MAX FLOW (GPM) MAHC	MAX FLOW (GPM) 60MJ AVG DOSE	MAX POWER (KW)	NO OF LAMPS	DIMENSIONS (INCHES)								APPROX WEIGHT (LB)	
					A	B	C	ANSI	Cab. No***	Cabinet (fan cooled)°			Chamber Empty	Cabinet Fan cooled
UV Swim I-100+	123	136	1.7	2	30.7	12.2	15.7	4	1	11.8	31.5	39.4	92.6	110.2
UV Swim I-200+	252	431	2.5	1	30.7	12.2	15.7	6	1	11.8	31.5	39.4	110.2	121.3
UV Swim I-450+	1453	933	5	2	30.7	12.2	15.7	8	1	11.8	39.4	47.2	172	176.4
UV Swim I-1000+	1734	1849	10	4	30.7	12.2	15.7	8	1	11.8	39.4	47.2	172	220.5
UV Swim I-4000+	5063	4755	16	4	35.3	14.5	21.7	14	1	23.6	39.4	79.13	330.7	396.8

UV CHAMBER

Material:	StSt 316L / 1.4404
Internal finish:	< 0.8 µm Ra, welds as laid, electropolished and passivated
External finish:	Brushed to K280, electropolished and passivated
Process (mating) connections:	Flange EN 1092-1 PN10
Drain connection:	BSPT Socket
End plate:	Removable end plate
Degree of protection:	IP54 equivalent to NEMA 12, but not for outside use
Wiper:	Automatic (electrically driven)
UV Lamp:	Medium pressure
Quartz Sleeve:	Doped quartz
Number of UV Lamps:	see table above
Expected lamp life:	9000 hours
Temperature sensor:	Yes
UV sensor:	Dry DVGW compliant UV sensor
Working fluid temperature:	33.8°F to 140°F
Hydrostatically pressure tested:	Yes
Chamber mounting:	Flow horizontal or vertical (lamps horizontal only)
Operating pressure:	6 bar
Pressure loss:	Typically <80mbar
Seals:	EPDM, ADI free, EC 1935/2004, FDA 21 CFR 177.2600 approved

OPTIONS

Document Support Pack
Cabinet material: Stainless steel 304 IP56 (NEMA 4x)
Operation and Maintenance manual and printed Installation and Commissioning manual in Chinese, English, French, German & Spanish
Flange options: PN16, ANSI 150, JIS, Table 'E' and tri-clamp
Lead length: 65.5 ft and 95.1 ft
In-field UV reference sensor kit
Aggressive water package: For 400 ppm to 20000 ppm chloride water
Control cabinet: Air conditioning in stainless steel raises control ambient limit to 122°F (in shade) IP rating 65 (NEMA 4X)
Water leak detection: Detects water leaks from quartz sleeve
Water level sensor: UV chamber full water detection

CABINET (FAN COOLED)

Material:	Polyester coated carbon steel, RAL 7035
Degree of protection:	IP54 (NEMA 12)
Supply voltages:	UV Swim I 100-1000: 208-277V (+/-10%) 1L+N, 2L, 3L 50/60 Hz 360-480V (-5/+10%) 3L+N, 50/60 Hz UV Swim I 4000: 380-480V (-5/+10%) 3L, 3L+N 50/60 Hz
Operating temperature range:	41°F to 95°F
Relative humidity:	<95% non-condensing
Cooling fans:	Yes
Interconnecting cable:	32.8 ft to chamber
Variable power:	Stepless variable power (70% reduction from maximum ballast power)

HMI/CONTROL

Display:	4 line LCD, indicating system status including alarms
Operating menu:	3 levels (2 with password protection)
Fault finding:	Event log

CUSTOMER OUTPUTS

4-20 mA passive output:	UV intensity, ballast power
VFC outputs:	Standby in remote, system standby, system cooling down, any trip, any warning, UV intensity failure, system ready, wiper failure, lamp failure, water leak, water temperature warning, water & cabinet temperature alarm

CUSTOMER INPUTS

4-20 mA active or passive inputs:	Flow meter UVT meter
VFC inputs:	Remote stop/start, remote clear message, remote wipe, remote set power high

CUSTOMER COMMUNICATIONS PORT

Modbus RS 485 serial RTU for SCADA connection


APPROVALS

UL 508A shop, CE Marked, US EPA UVDGM, MAHC, DVGW, NSF50
--



UV Swim I

Also available in our Pools & Leisure product range...



Standard treatment and
dechloramination



Poland
+48 511 744 077
biuro@arwito.pl

Mexico
+1 980 256 5700
americas@nuvonicuv.com

USA
+1 980 256 5700
americas@nuvonicuv.com

Canada
+1 980.256.5700
americas@nuvonicuv.com



A Halma company

formerly Aquionics, Berson, Hanovia and Orca GmbH

www.uvcell.pl
nuvonicuv.com

©2023 Nuvonic 910430-3400-05-EN



FM 29365